

ZRP-100


Z-Wave Repeater

Makes the Z-Wave network complete, dead-spot-free



Product description

- A. Status LED
- B. PROG Push button
- C. Fixing hole
- D. AC plug
- E. External fixing insert and screw

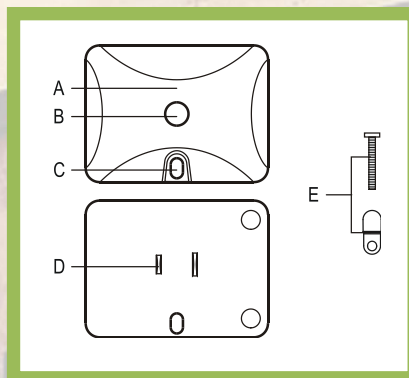

Benefits:

- Supports Network Wide Inclusion (NWI) and Explore Frames
- Reliable and best RF performance to repeat Z-Wave signals
- Ultra-low power consumption
- Complex, thin and small size form factor
- Does not block lower outlet when plugged into upper outlet of a duplex wall receptacle and vice versa
- External fixing insert for different wall plate

Specifications:

- Operation Voltage: 120 Vac
- Input Frequency: 60 Hz
- RF rang: up to 100ft at open area
- RF frequency: 908.42MHz
- Dimensions: 64 x 48 x 23mm

	Un-grounded AC outlet with center screw	Grounded AC outlet with center screw	Grounded AC outlet with upper and lower screw
Installed at upper AC outlet			
Installed at lower AC outlet			

Supported Command Classes:

	Z-Wave Device Class:
1	Routing Slave
2	Repeater Slave Generic Device Class
3	Basic Repeater Slave Specific Device Class

	Z-Wave Command Class	Controlled	Supported
1	COMMAND_CLASS_BASIC, version 1	No	Yes
2	COMMAND_CLASS_POWERLEVEL, version 1	No	Yes
3	COMMAND_CLASS_MANUFACTURER SPECIFIC, version 1	No	Yes
4	COMMAND_CLASS_VERSION, version 1	No	Yes



Specifications are subject to change without notice,
due to continuing product improvement.

Ordering part number: BW8140

Remotec

Workshop No. B2, 2/F., Block B, Tonic Industrial Centre,
19 Lam Hing Street, Kowloon Bay, Hong Kong

Website: <http://www.remotec.com.hk>

Tel: (852) 2314 0330 Fax: (852) 2314 1006
E-mail: rtlsales@remotec.com.hk